

## **CC112X/CC1200 On-Chip Temperature Sensor**

by Bjarte Nystøyl

---

### **Keywords**

- *Temperature sensor*
- *Calibration*
- *Register settings*
- *CC1120*
- *CC1121*
- *CC1125*
- *CC1200*
- *GBIAS*
- *GPIO*
- *ATEST*

### **1 Introduction**

This design note provides the necessary information in order to use the temperature sensor of the CC112X and CC1200 family. The temperature sensor is based on a

Proportional to Absolute Temperature (PTAT) current from a bandgap cell fed to a resistor to generate a PTAT voltage.

## Table of Contents

KEYWORDS.....	1
1 INTRODUCTION.....	1
2 ABBREVIATIONS.....	2
3 OPERATION.....	3
4 TEMPERATURE SENSOR PARAMETERS.....	3
5 CALIBRATION.....	4
5.1 SINGLE-POINT CALIBRATION.....	4
5.1.1 <i>Performing Single-Point Calibration</i> .....	4
5.1.2 <i>Single-Point Calibration Example</i> .....	5
5.2 TWO-POINT CALIBRATION.....	6
5.2.1 <i>Performing Two-Point Calibration</i> .....	6
5.2.2 <i>Two-Point Calibration Example</i> .....	6
5.3 CHANGE IN SUPPLY VOLTAGE (VDD).....	7
6 REFERENCES.....	7
7 GENERAL INFORMATION.....	7
7.1 DOCUMENT HISTORY.....	7

## 2 Abbreviations

VDD	Supply Voltage
PTAT	Proportional to Absolute Temperature
GPIO	General Purpose Input/Output

## 3 Operation

The temperature sensor is activated using the register settings of Table 1, which makes the GBIAS output a single-ended voltage measurement on GPIO1.

Register	Value
IOCFG1	0x80
ATEST	0x2A
ATEST_MODE	0x0C
GBIAS1	0x07

Table 1. Register Settings for Temperature Sensor

Setting IOCFG1 to 0x80 configures the GPIO1 pad into analog mode (digital GPIO input and output is disabled). The remaining registers set up the ATEST (analog test) module to output the temperature value as a PTAT voltage on the GPIO1.

## 4 Temperature Sensor Parameters

General Information	Value	Unit
Temperature sensor fitted from	-40 to +85	°C
Effect of supply voltage deviance	1.17	mV/ VDD-V
Effect of supply voltage deviance	0.44	°C / VDD-V

Changes in the supply voltage affect the voltage of the GPIO pin, and the supply voltage must be stable in order to get accurate temperature sensor readings.

### VDD - 2V

Technical Information	Value	Unit
Typical output voltage @ 0 °C	727.42	mV
Typical output voltage @ 25 °C	793.73	mV
Temperature coefficient ( $t_c$ )	2.6598	mV / °C

### VDD - 3V

Technical Information	Value	Unit
Typical output voltage @ 0 °C	728.55	mV
Typical output voltage @ 25 °C	794.78	mV
Temperature coefficient ( $t_c$ )	2.6733	mV / °C

### VDD - 3.6V

Technical Information	Value	Unit
Typical output voltage @ 0 °C	730.62	mV
Typical output voltage @ 25 °C	796.94	mV
Temperature coefficient ( $t_c$ )	2.6773	mV / °C

Table 2. Typical Temperature Sensor Parameters

## 5 Calibration

As seen in Figure 2, the CC112X/CC1200 temperature sensor voltage is highly linear, but for some devices there is an offset in the GPIO1 voltage from the typical (average) value that could potentially give an error of up to  $\pm 10^{\circ}\text{C}$  in the temperature reading. In order to ensure accurate temperature sensor measurements the sensor must therefore be calibrated. There are two simple approaches depending on the required accuracy level; single- and two-point calibration.

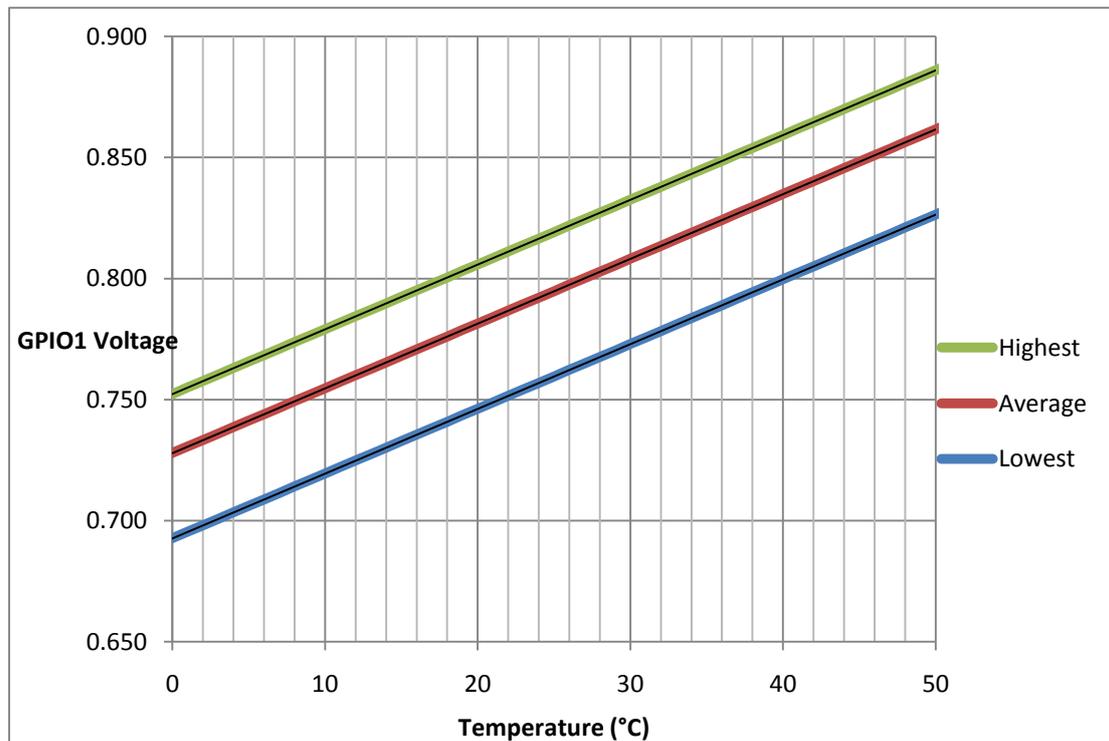


Figure 1. GPIO1 Voltage vs Temperature

### 5.1 Single-Point Calibration

This is a simple and fast approach, and can be applied for applications targeting approximately  $\pm 1^{\circ}\text{C}$  accuracy within a limited temperature range around the temperature used for the single-point calibration, or approximately  $\pm 2^{\circ}\text{C}$  accuracy across the  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$  temperature range.

#### 5.1.1 Performing Single-Point Calibration

The calibration should be performed at the centre of the temperature range in which the device will operate. A given temperature  $T$  will thus be given as:

$$T = T_{\text{CALIBRATION}} + \frac{(V_{\text{MEASURED}} - V_{\text{CALIBRATION}})}{t_c} \quad \text{Equation 1}$$

- $T_{\text{CALIBRATION}}$  is the temperature when the calibration is performed
- $t_c$  is the temperature coefficient for the given supply voltage (see the typical temperature parameters in Table 2)
- $V_{\text{MEASURED}}$  is the voltage of the GPIO1 pin at a given temperature
- $V_{\text{CALIBRATION}}$  is the GPIO1 voltage at the calibration temperature

## Design Note DN403

Performing a single-point calibration removes the error caused by the device specific voltage offset seen in Figure 1. The temperature reading accuracy is then limited by the accuracy of the individual temperature coefficients as the *typical* temperature coefficient is used in Equation 1.

Figure 2 shows the maximum error in the temperature reading when using the lowest and highest temperature coefficients out of 30 devices from different processing corners.

- Approximately  $\pm 2^{\circ}\text{C}$  accuracy is possible across the  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$  temperature range with single-point calibration and using the *typical* temperature coefficient in Table 2.
- Approximately  $\pm 1^{\circ}\text{C}$  accuracy is possible across the temperature range defined by  $T_{\text{CALIBRATION}} \pm 25^{\circ}\text{C}$  with single-point calibration and using the *typical* temperature coefficient in Table 2.

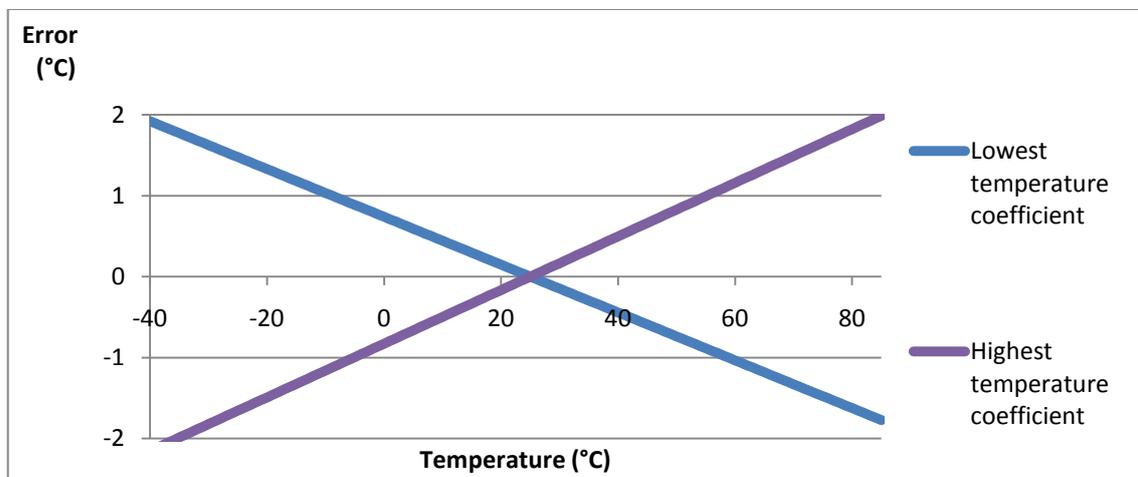


Figure 2. Temperature Error due to Different Temperature Coefficients after Single-Point Calibration

### 5.1.2 Single-Point Calibration Example

A CC112X/CC1200 device is operated using at 3V supply voltage. The temperature coefficient is typically  $2.673\text{ mV}/^{\circ}\text{C}$  and for each degree Celsius increase in temperature the GPIO1 voltage increases by  $2.673\text{ mV}$ .

The device is calibrated at room temperature ( $25^{\circ}\text{C}$ ), and the GPIO1 voltage is measured to be  $793.0\text{ mV}$ . After changing the temperature, the GPIO1 voltage is measured to be  $830.0\text{ mV}$ . This corresponds to a temperature  $T$  of:

$$T = 25^{\circ}\text{C} + \frac{(830\text{mV} - 793\text{mV})}{2.673\text{mV}/^{\circ}\text{C}}$$

$$T = 25^{\circ}\text{C} + 13.84^{\circ}\text{C} = 38.84^{\circ}\text{C}$$

## 5.2 Two-Point Calibration

If the application requires better accuracy than given by the single-point calibration, a two-point calibration must be used to correct for chip-to-chip variations in the temperature coefficients. As the sensor is highly linear, a two-point calibration will ensure high accuracy across the full temperature range of the chip.

### 5.2.1 Performing Two-Point Calibration

Choose two calibration temperatures more than 10°C apart, called  $T_0$  and  $T_1$ , and set the reference voltage ( $V_{DD}$ ) to what it will be in the final product (Note that changes in the voltage supply will influence the temperature sensor output). Measure the output from the GPIO1 pin ( $V_0$  and  $V_1$ ) at the corresponding temperatures.

The temperature coefficient has a *typical* value of 2.673 mV/°C. The *exact* coefficient ( $t_c$ ) for a given device is calculated as:

$$t_c = \frac{V_1 - V_0}{T_1 - T_0}$$

Using the exact coefficient, the measured voltage of the GPIO1 pin ( $V_{MEASURED}$ ), the temperature ( $T_0$ ) and the GPIO1 voltage ( $V_0$ ) of the first calibration, the temperature  $T$  can be found as:

$$T = T_0 + \frac{(V_{MEASURED} - V_0)}{t_c}$$

### 5.2.2 Two-Point Calibration Example

A CC112X/CC1200 device is operated using a 3V supply voltage, and will thus have a typical temperature coefficient of 2.673 mV/°C.

The device is calibrated at two temperatures, 0°C and 25°C ( $T_0$  and  $T_1$ ). The respective GPIO1 voltages are measured to be 743.379 mV and 808.312 mV ( $V_0$  and  $V_1$ ). The exact temperature coefficient  $t_c$  is thus given as:

$$t_c = \frac{808.312mV - 743.379mV}{25^\circ C - 0^\circ C} = 2.5973mV / ^\circ C$$

At a given temperature  $T$ , the GPIO1 voltage is measured to be 921.465 mV. This corresponds to:

$$T = 0^\circ C + \frac{(921.465mV - 743.379mV)}{2.5973mV / ^\circ C} = 68.57^\circ C$$

*Note: Single-point calibration at 25°C, using the typical  $t_c$  of 2.673 mV/°C, would in this case give a temperature reading of 67.33 °C, which would have an error of 1.24°C.*

## 5.3 Change in Supply Voltage (VDD)

As seen in Figure 3, the voltage measured on the GPIO1 pin depends on the supply voltage. Changing the supply voltage affects the measured voltage on the GPIO1 pin by typically 1.17 mV/V. This means that if the supply voltage is decreased by 1 V, the voltage measured at the GPIO1-pin is typically 1.17 mV lower.

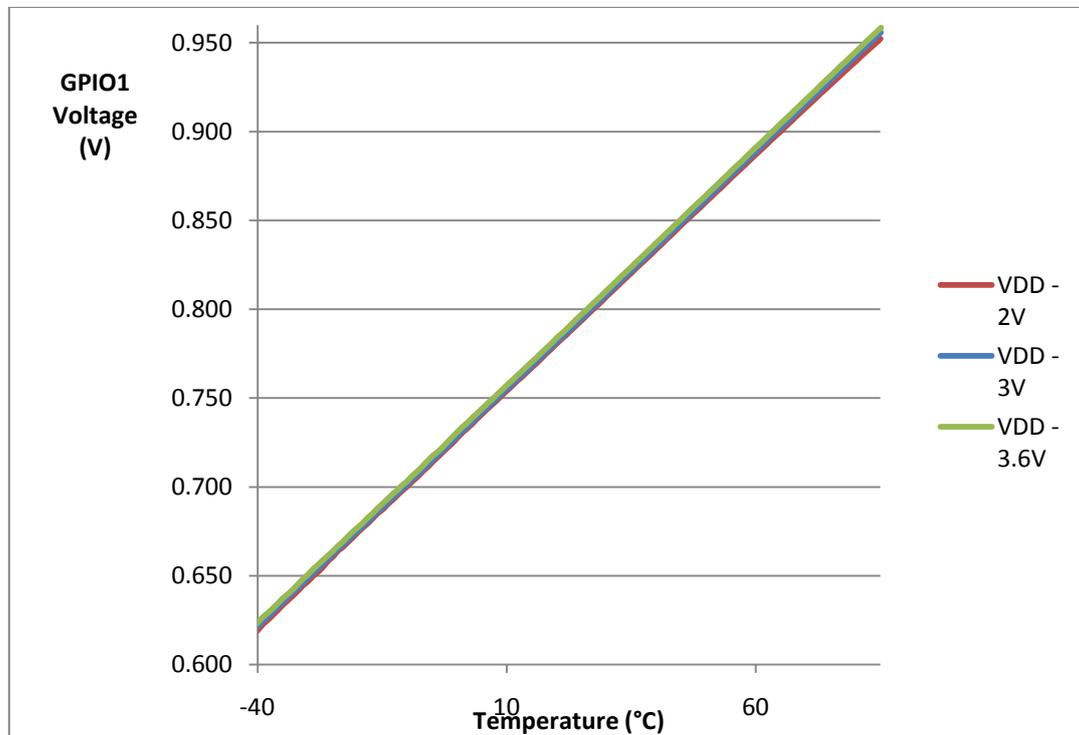


Figure 3. Typical GPIO1 Measurements vs Supply Voltage

## 6 References

- [1] CC1120 Data Sheet ([swrs112](#))
- [2] CC1121 Data Sheet ([swrs111](#))
- [3] CC1125 Data Sheet ([swrs120](#))
- [4] CC112X User Guide ([swru295](#))

## 7 General Information

### 7.1 Document History

Revision	Date	Description/Changes
SWRA415	2012.10.30	Initial release.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components which meet ISO/TS16949 requirements, mainly for automotive use. Components which have not been so designated are neither designed nor intended for automotive use; and TI will not be responsible for any failure of such components to meet such requirements.

### Products

Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
OMAP Applications Processors	<a href="http://www.ti.com/omap">www.ti.com/omap</a>
Wireless Connectivity	<a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a>

### Applications

Automotive and Transportation	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Communications and Telecom	<a href="http://www.ti.com/communications">www.ti.com/communications</a>
Computers and Peripherals	<a href="http://www.ti.com/computers">www.ti.com/computers</a>
Consumer Electronics	<a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>
Energy and Lighting	<a href="http://www.ti.com/energy">www.ti.com/energy</a>
Industrial	<a href="http://www.ti.com/industrial">www.ti.com/industrial</a>
Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Space, Avionics and Defense	<a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a>
Video and Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>

### TI E2E Community

[e2e.ti.com](http://e2e.ti.com)