
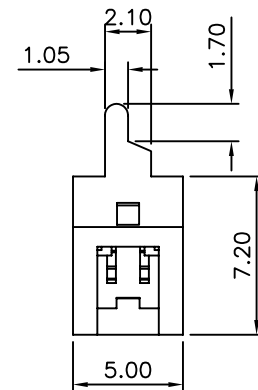
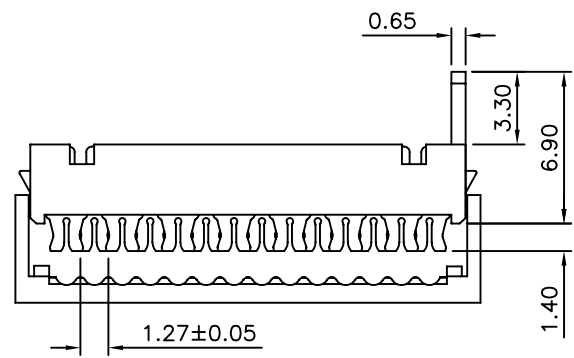
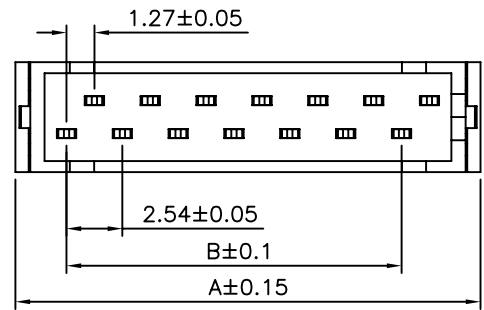


SPECIFICATIONS
 Current Rating:1.0A AC,DC
 Voltage Rating:30V AC,DC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megohms Min.
 Withstanding Voltage:AC 500V AC/Minute
 Operating Temperature:-40°C ~ +105°C
 Insulator:High Temp. Plastic UL94V-0
 Contact:Phosphor Bronze
 Finish:Tin Plated

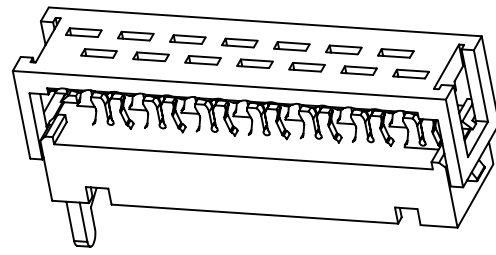

Circuit	Dim. A	Dim. B
04	8.45	2.54
06	10.99	5.08
08	13.53	7.62
10	16.07	10.16
12	18.61	12.70
14	21.15	15.24
16	23.69	17.78
18	26.23	20.32
20	28.77	22.86

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.2 .XX ±0.15 ANG.				
09225		MEI						
		BECKY						
		DRAWING BY						
		HZF						
SCALE	NONE	REV.	A0	UNIT	mm	△ A0	NEW RELEASE	BECKY 02/15/2005
						NO.REV.	REVISIONS	CHK DATE