

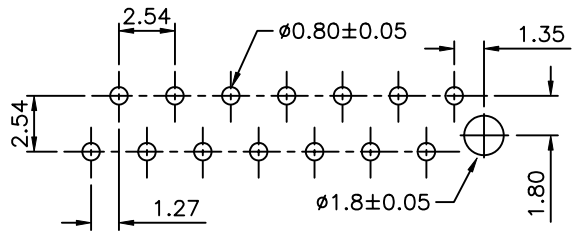
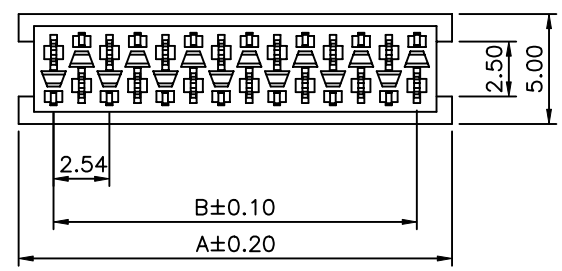
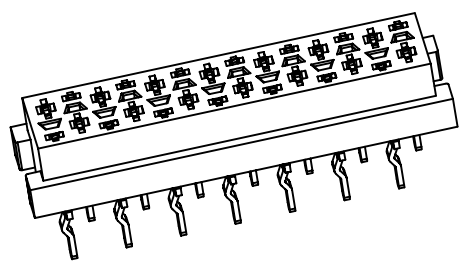


SPECIFICATIONS
 Current Rating:1.0A AC,DC
 Voltage Rating:30V AC,DC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megohms Min.
 Withstanding Voltage:AC 500V/Minute
 Operating Temperature:-40°C~+105°C
 Insulator:High Temp. Plastic,UL 94V-0
 Color:Red
 Contact:Phosphor Bronze
 Finish:Tin Plated 100u"
 RoHS Compliant



PCB Layout

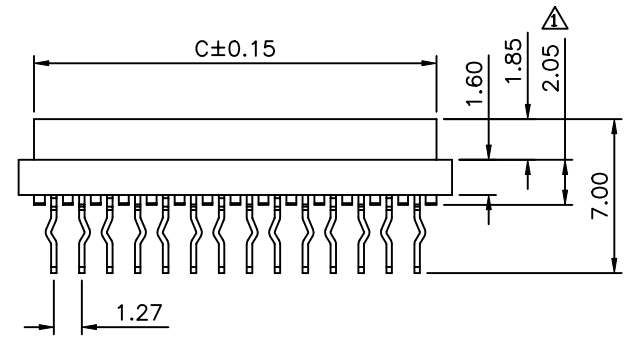

△ Circuit	A	B	C
04	7.00	3.81	5.60
06	9.54	6.35	8.14
08	12.08	8.89	10.68
10	14.62	11.43	13.22
12	17.16	13.97	15.76
14	19.70	16.51	18.30
16	22.24	19.05	20.84
18	24.78	21.59	23.38
20	27.32	24.13	25.92
22	29.86	26.67	28.46
24	32.40	29.21	31.00
26	34.94	31.75	33.54

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.2 .XX ±0.15 ANG.
09243		MEI		
		BECKY		
		DRAWING BY		UNIT mm
		HZF		
SCALE	NONE	REV.	A2	NO. REV.

△ A2	Modify SPC.	HZF	11/05/2008
△ A1	Add Dim.:2.05&Pins:22,24,26	BECKY	01/12/2006
△ A0	NEW RELEASE	BECKY	02/15/2005
NO. REV.	REVISIONS	CHK	DATE