File No.	112DI12226	SHEET	1/1

④ SPECIFICATION

Current Rating: 1A Max.
Dielectric Withstanding Voltage: 30V AC For 1 Minute
Insulation Resistance: 1000 Megaohms Min. At DC 500V
Contact Resistance: 30 Milliohms Max.
Temperature Range: −55°C~+105°C
Housing: PA6T(UL94V−0), White
Contact: Brass, Gold Plated On Contact Area, Tin Plated On Solder Tails, Over Nickel
Shell: Cold Rolled Steel, Nickel Plated Over Copper
RoHS Compliant

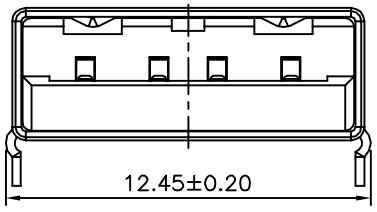

④

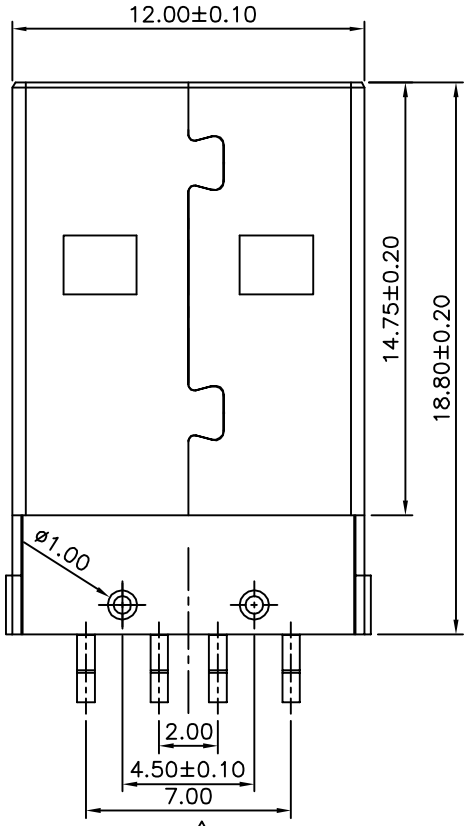

④

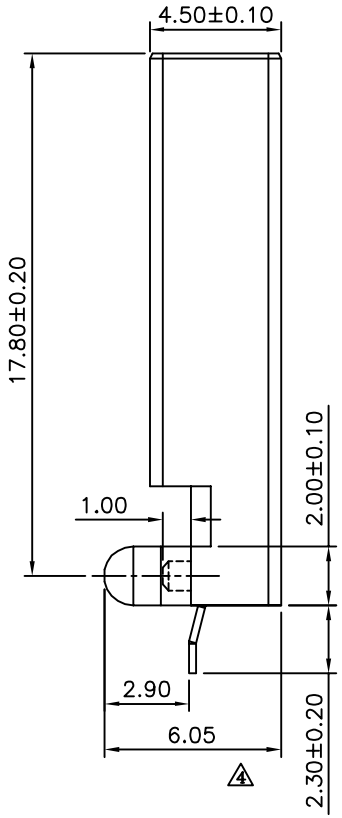

④

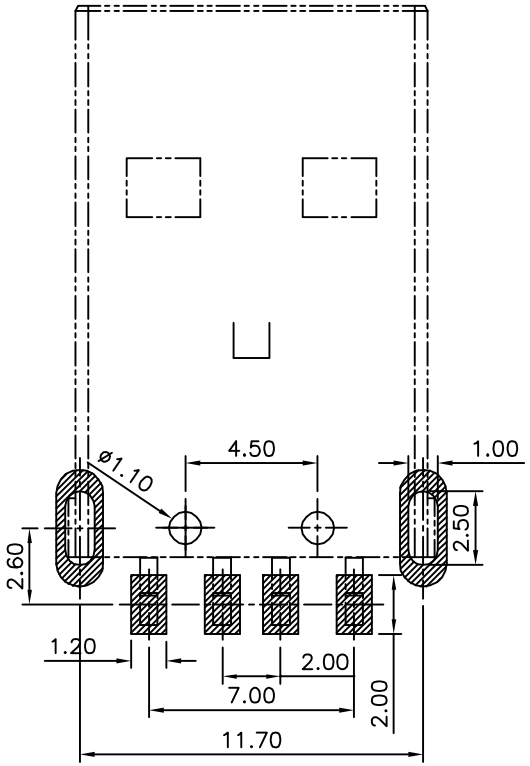

④ Recommended P.C.B. Layout
(PCB Board Tolerance±0.10)

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	EMILY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
10017	CHECKED BY	HZF	④ .X ±0.30 .XX ±0.20 .XXX ±0.10 ANG. ±1°
	DRAWING BY	WZL	
SCALE NONE	REV.	A4	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
④	A4	Modify Data	HZF	09/23/2010
③	A3	Modify Data	HZF	06/12/2009
②	A2	Modify Part No.	INGRID	10/01/2007
①	A1	Add Dim.	BECKY	01/20/2006
⓪	A0	NEW RELEASE	MEI	10/10/2001