


△ SPECIFICATION

Current Rating: When Applying Current Only To Signal Terminals:
 1.0A (For Terminal No. 2, 3 And 4)
 When Applying Current Only To Power Terminals:
 1.8A (For Terminal No. 1 And 5)
 0.5A (For Terminal No. 2, 3 And 4)

Voltage Rating: 30V AC
 Insulation Resistance: 100 Megaohms At 100V DC
 Dielectric Withstanding Voltage: 100V RMS AC For 1 Minute
 Contact Resistance: 30 Milliohms Max.
 Operating Temperature: -30°C ~ +80°C
 Housing: LCP (UL94V-0), Black
 Contact: C2680, Gold Flash Over Nickel
 Shell: Stainless Steel, Tin Plated Over Nickel
 RoHS Compliant

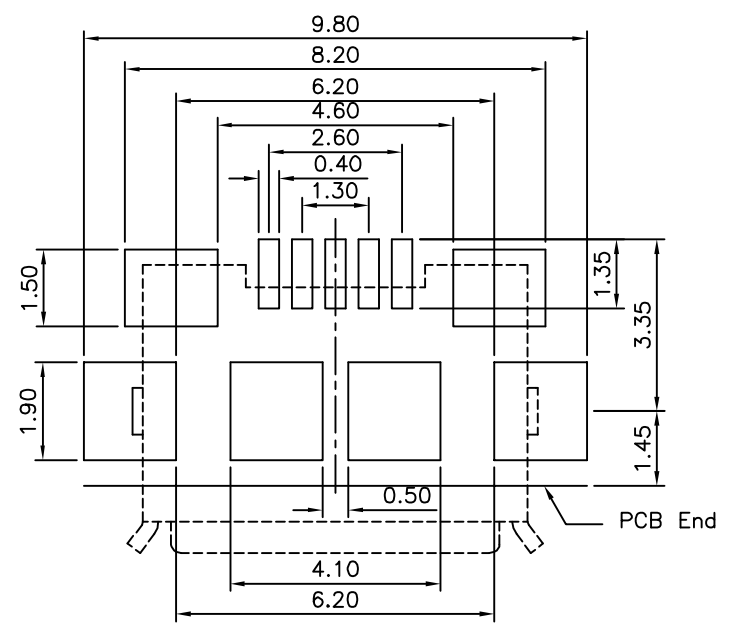

Recommended P.C.B. Layout

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
20696		MEI		
		CHECKED BY HZF		
		DRAWING BY HAO		X. ±0.50 X.* ±5*
SCALE	NONE	REV.	A2	.X ±0.25 .X.* ±2*
				.XX ±0.15 .XX.* ±1*
				UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	07/15/2015
△ A1		Modify Data	HZF	06/23/2015
△ A0		NEW RELEASE	HZF	05/21/2014