

## **SPECIFICATION**

Model No. : SGP.25c

Part No. : **SGP.1575.25.4.C.02** 

Product Name : GPS SMT Patch Antenna

Features : 25mm\*25mm\*4.5mm

1575MHz Centre Frequency

Patent pending

**RoHS** ✓

Photo :



SPE-11-8-139/A Page 1 of 8



#### 1.0 Introduction

This ceramic GPS patch antenna is based on smart *XtremeGain*™ technology. It is mounted via SMT process and has been selected as optimal solution for the 45\*45mm ground plane.

### 2.0 Key Antenna Performance Indicators

### Original Patch Specification tested on 45mm ground plane

No	Parameter	Specification	Notes
1	Range of Receiving Frequency	1575.42 MHz ± 1.023 MHz	
2	Center Frequency	1575.42 ±	With 45mm <sup>2</sup>
		3MHz	ground plane
			Return Loss ≤-10
3	Bandwidth	5MHz min	dB
4	VSWR	1.5 max	
5	Gain at Zenith	+2.0 dBic typ.	
6	Gain at 10°elevation	-3.0 dBic typ.	
7	Axial Ratio	3 dB max	
8	Polarization	RHCP	
9	Impedance	50 Ohms	
	Frequency Temperature	0 ± 20ppm /	
10	Coefficient $(\tau f)$	°C	-40ºC to +85ºC
11	Operating Temperature	-40°C to +85°C	


<sup>\*\*</sup>Changes in user groundplane and environment will offset centre frequency


SPE-11-8-139/A Page 2 of 8



## 3.0 Mechanical Specifications

### 3.1 Dimensions and Drawing

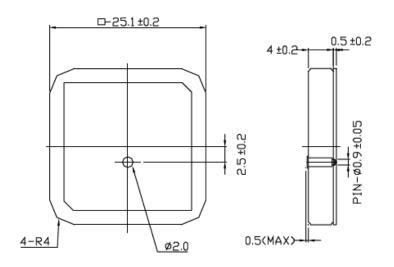




SPE-11-8-139/A Page 3 of 8



#### 3.2 Antenna footprint (view from underneath)

Please note: solder mask has been added to all areas except gold solder areas (green highlighted areas), this will prevent Feed points connecting to ground of main PCB

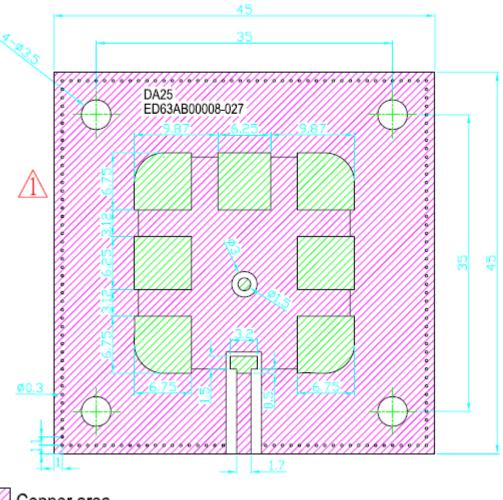


Copper area

Solder Pads

SPE-11-8-139/A Page 4 of 8



# 3.3 Test Jig and Dimension

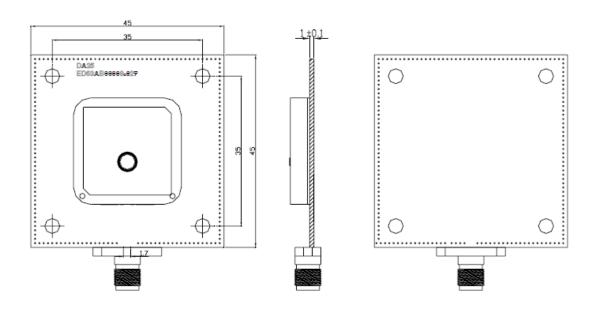





SPE-11-8-139/A Page 5 of 8




### 3.4 Test Fixture set up and measurements

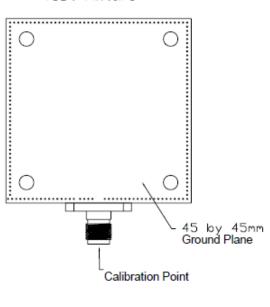

Test Fixture




Antenna Setup & Measurements

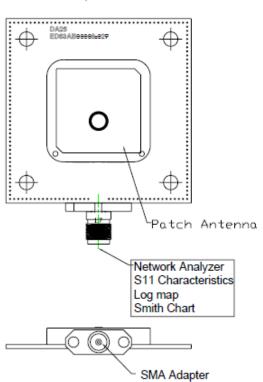


SPE-11-8-139/A Page 6 of 8



# 3.5 Delivery Mode

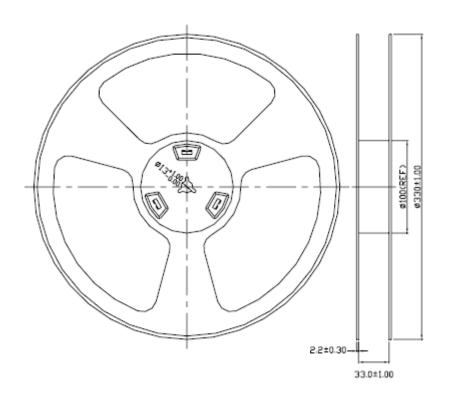



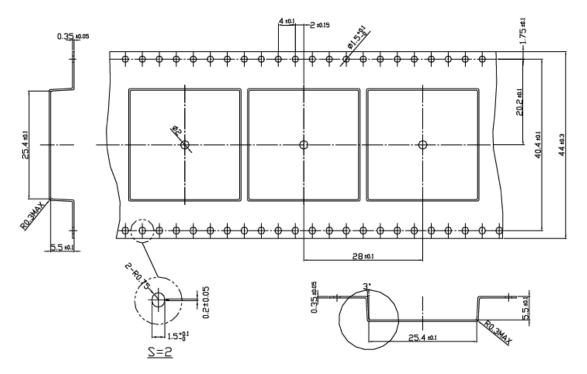


SPE-11-8-139/A Page 7 of 8



## **4.0Electrical Specifications**

#### 4.1 Smith Chart

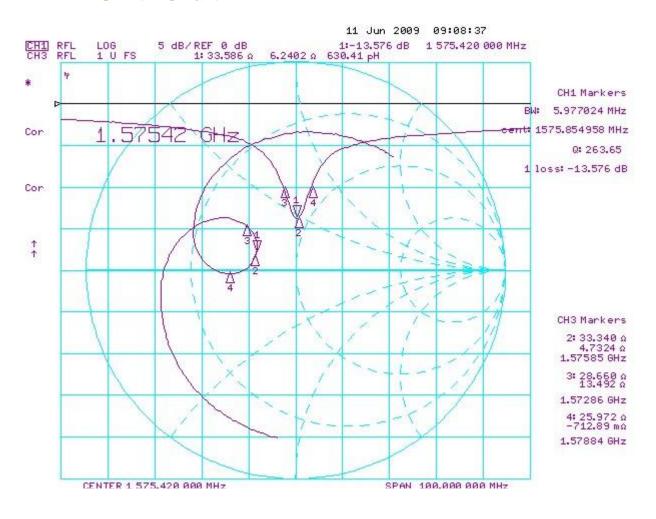

SPE-11-8-139/A Page 8 of 8